


• stat. konst.

$$\beta_V = \beta_E$$

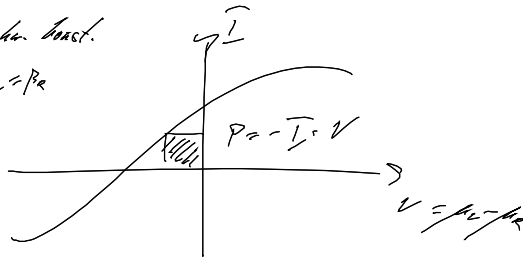

→ sekundäre Verteilung von 2. HS → Entropie

• Rotzahl ohne FB

$$\dot{P}_a = \sum_V \sum_B W_{ab}^{(M)} \cdot P_b$$

$$W_{aa}^{(M)} = - \sum_{b \neq a} W_{ba}^{(M)}$$

$$\frac{W_{ab}^{(M)}}{W_{ba}^{(M)}} = e^{-\beta_V [(E_b - E_a) - \mu_V (N_b - N_a)]}$$

$$\dot{S} = - \sum_a \dot{P}_a \ln P_a(t)$$

$$\dot{S} = \dot{S}_I + \dot{S}_E \geq 0$$

$$\dot{S}_E = \sum_V \dot{S}_E^{(M)}$$

$$\dot{S}_E^{(M)} = \sum_{ij} W_{ij}^{(M)} P_j \ln \left(\frac{W_{ij}^{(M)}}{W_{ji}^{(M)}} \right) = \beta_V \left[\sum_{ij} \frac{W_{ij}^{(M)}}{W_{ji}^{(M)}} \dot{Q}_{ij}^{(M)} \right]$$

$$\dot{Q}^{(M)} = \begin{pmatrix} \dot{Q}^{(M)} & \textcircled{1} \\ \textcircled{2} & \dots \end{pmatrix}$$

$$\dot{I}_E^{(M)} = \text{Tr} \{ \dot{H}_E (\dot{Q}^{(M)} \rho) \} - \sum_i E_i (\dot{Q}^{(M)} \rho)_{ii} = \sum_{ij} E_i W_{ij}^{(M)} \dot{S}_{ij}$$

$$= \sum_{ij: i \neq j} E_i W_{ij}^{(M)} \dot{S}_{ij} - \sum_{ij: i \neq j} E_i W_{ji}^{(M)} \dot{S}_{ji} = \sum_{ij} (E_i - E_j) W_{ij}^{(M)} \frac{\dot{S}_{ij}}{P_j}$$

• mit feedback:

$$\frac{W_{ij}^{(M)}}{W_{ji}^{(M)}} = e^{\beta_V [(E_i - E_j) - \mu_V (N_i - N_j)]}$$

LDB oder FB

$$e^{-\frac{\dot{S}_{ij}^{(M)}}{P_j}}$$

Multiplication ohne Energie-Änderung

$$e^{-\frac{\dot{S}_{ij}^{(M)}}{P_j}}$$

mit Energie-Änderung

$$\dot{S}_i \geq 0$$

$$\dot{S}_i = \dot{S} - \sum_V \beta_V \dot{Q}^{(M)} + \dot{I}_1 + \dot{I}_2 \geq 0$$

$$\frac{d}{dt} E = \frac{d}{dt} \sum_i E_i \cdot P_i = \sum_V \dot{I}_E^{(M)} + \dot{I}_E^{FB}$$

$$\dot{I}_E^{(M)} = \sum_{ij} (E_i - E_j) \cdot W_{ij}^{(M)} P_j$$

$$\dot{I}_E^{FB} = \sum_V \sum_{ij} (E_i - E_j) W_{ij}^{(M)} P_j$$

7.1.4. Beispiel AD or SET

$$\dot{Z}_{FB} = \sum_V \begin{pmatrix} -\Gamma_V^E \rho_V^E & \Gamma_V^F (1 - \rho_V^F) \\ +\Gamma_V^E \rho_V^E & -\Gamma_V^F (1 - \rho_V^F) \end{pmatrix}$$

$$\rho_V^{E/F} = f_V(\epsilon_{E/F})$$


$$\dot{I}_E^{(M)} = \epsilon_E \Gamma_V^E \rho_V^E \cdot P_0 - \epsilon_F \Gamma_V^F (1 - \rho_V^F) \cdot P_1$$

$$I_E^{H_0} = (E_F - E_E) \sum_V \sum_{F_0} \rho_0$$


$$\frac{\sum_{F_0}^{0 \rightarrow V}}{\sum_{F_0}^{V \rightarrow 0}} = \frac{\Gamma_V^F}{\Gamma_V^E} \frac{1 - f_V^F}{f_V^E} = \underbrace{\left(\frac{1 - f_V^E}{f_V^E} \right)}_{\text{Pulley } \beta} \underbrace{\left[\frac{\Gamma_V^F}{\Gamma_V^E} \right]}_{\text{Maxwell-Daemon } \beta} \underbrace{\left\{ \frac{1 - f_V^F}{1 - f_V^E} \right\}}_{\text{energet. feedback}}$$

$$\rightarrow I_1 / I_2$$

$$S: \xrightarrow{t \rightarrow \infty, \beta_2 = \beta_1} \beta \underbrace{\left(\frac{\Gamma_V^F}{\Gamma_V^E} - \frac{\Gamma_V^E}{\Gamma_V^F} \right)}_{-\beta \sum \left[\frac{\Gamma_V^M}{\Gamma_V^E} - \frac{\Gamma_V^M}{\Gamma_V^E} \right]} I_A + \beta \cdot I_E^{F_0} + I_1 + I_2 \geq 0$$

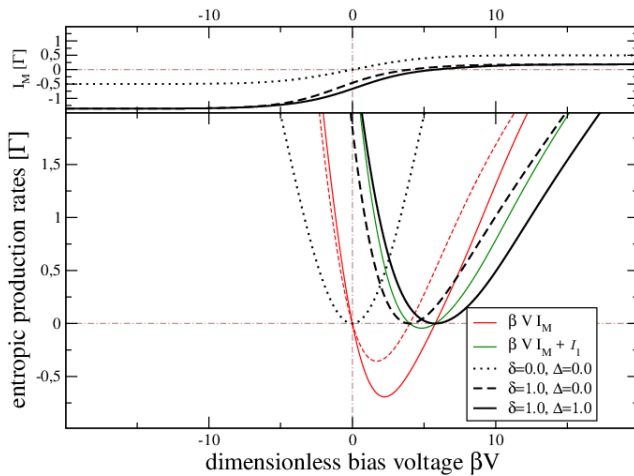

7.2. Autonomer Dämon



$$\mathcal{Z} = \mathcal{Z}_D + \mathcal{Z}_L + \mathcal{Z}_R$$

$$\text{Syst. } \{E, F\} \quad \mathcal{Z}_D \begin{bmatrix} P_{DE} \\ P_{ED} \\ P_{DF} \\ P_{FD} \end{bmatrix} \leftarrow \mathcal{Z}_L / \mathcal{Z}_R$$

$$\mathcal{Z}_D = \begin{pmatrix} -\Gamma_D P_0 & \Gamma_D (1 - P_0) & 0 & 0 \\ \Gamma_D P_0 & -\Gamma_D (1 - P_0) & 0 & 0 \\ 0 & 0 & -\Gamma_D^a P_0^a & +\Gamma_D^a (1 - P_0^a) \\ 0 & 0 & +\Gamma_D^a P_0^a & -\Gamma_D^a (1 - P_0^a) \end{pmatrix}$$

$\begin{matrix} +i\beta(E_0 + E_1) \\ -i\beta(E_0 + E_1) \end{matrix}$


$$H_S = E_0 d_0^+ d_0 + E_1 d_1^+ d_1 + \mu d_0^+ d_0 + d_1^+ d_1$$

$$P_V = P_V(E) \quad \Gamma_V^a = \Gamma_V(E + \mu)$$

$$f_V = f_V(E) \quad f_V^a = f_V(E + \mu)$$

3 Terminals \rightarrow 6 Fallfelder


$$\text{izSS } \frac{I_E^{(1)}}{I_E} + \frac{I_E^{(2)}}{I_E} + \frac{I_E^{(3)}}{I_E} \rightarrow 0 \quad I_A^{(1)} \rightarrow 0 \quad I_A^{(2)} + I_A^{(3)} \rightarrow 0$$

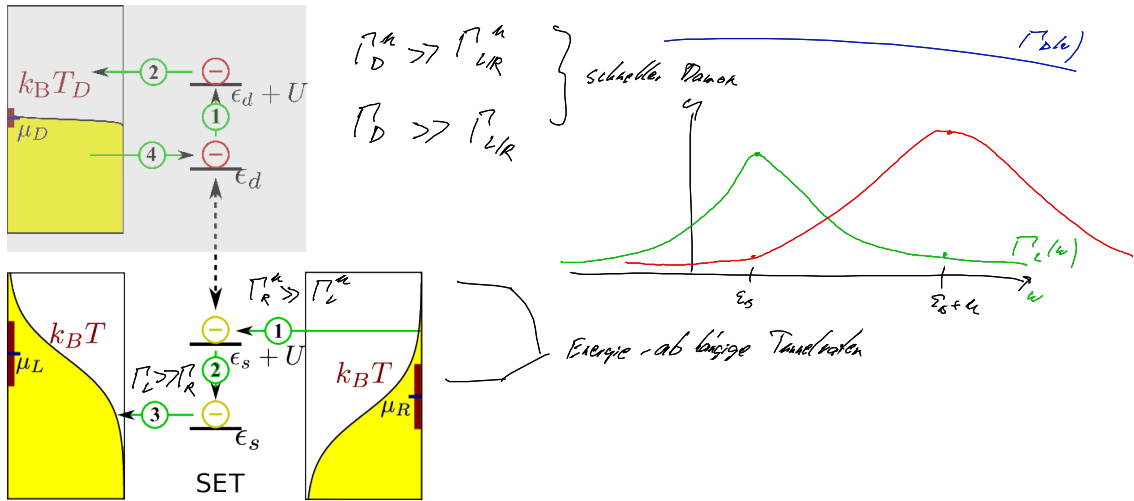

Umwandlung von Wärme in elek. Arbeit $P = -\dot{Q}_D (\mu_D - \mu_R)$

$$\eta = \frac{P}{\dot{Q}^{(L)} + \dot{Q}^{(R)}}$$

$$\dot{Q}^{(L)} + \dot{Q}^{(R)} = \frac{\dot{Q}_L + \dot{Q}_R}{\beta} - \mu_L \dot{I}_L - \mu_R \dot{I}_R = \frac{P}{\beta_{class} + \beta} \leq 1 - \frac{T_D}{T} = \eta_{Carnot}$$

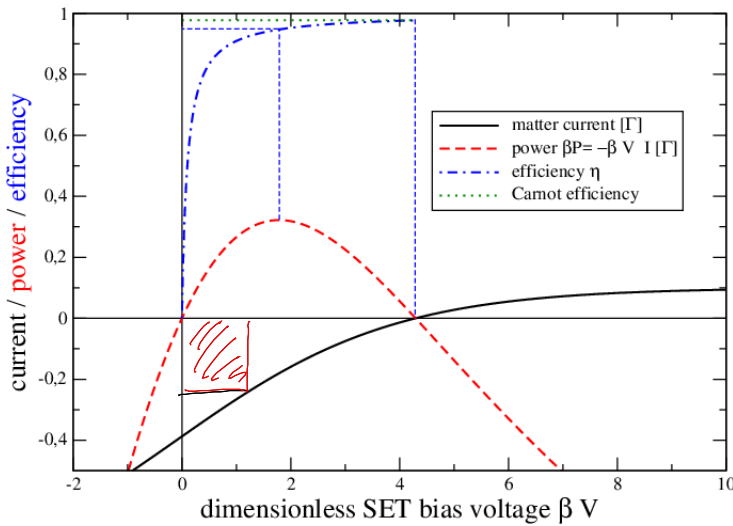

\rightarrow Aussparen des Dämon-dots

$$\dot{P}_i = \sum_j \sum_{j'} Z_{ij} Z_{ij'} P_{j'}$$

↑
Spalten
↓
Zeilen

$$P_i = \sum_j P_{ij}$$

$$\dot{P}_i = \sum_j \sum_{j'} Z_{ij} Z_{ij'} P_{j'} = \sum_{j'} \left[\sum_{ij} Z_{ij} Z_{ij'} \frac{P_{j'}(H)}{P_{j'}(H)} \right] P_{j'}(H) = \sum_{j'} Z_{ij}(H) P_{j'}$$

↑
bekannt

↑
konst. WS für Dämon in j' falls System in j'

falls $\Gamma_D^{(a)} \gg \Gamma_{LR}^{(a)}$

$$\bar{P}_{01E} = \frac{\bar{P}_{E0}}{\bar{P}_E} = 1 - f_D$$

$$\bar{P}_{11E} = f_D$$

$$\bar{P}_{01F} = 1 - f_D^a$$

$$\bar{P}_{11F} = f_D^a$$

gleichzeit konstant

$$Z = \begin{pmatrix} -Z_{FE} & +Z_{EF} \\ +Z_{FE} & -Z_{EF} \end{pmatrix}$$

$$Z_{EF} = [\Gamma_L(1-f_L) + \Gamma_R(1-f_R)] \cdot (1-f_D^a) + [\Gamma_L^a(1-f_L^a) + \Gamma_R^a(1-f_R^a)] \cdot f_D^a$$

$$Z_{FE} = [\Gamma_L \cdot f_L + \Gamma_R \cdot f_R] \cdot (1-f_D) + [\Gamma_L^a f_L^a + \Gamma_R^a f_R^a] \cdot f_D$$

$$\dot{S}_i = \frac{1}{T_M} \cdot \ln \left(\frac{Z_{EF}^{(L)} \cdot Z_{FE}^{(R)}}{Z_{FE}^{(L)} \cdot Z_{EF}^{(R)}} \right)$$

$$A = \underbrace{\ln \left(\frac{\Gamma_L \Gamma_R^a}{\Gamma_L^a \Gamma_R} \right)}_{\text{Informations-fB}} + \underbrace{\ln \left(\frac{f_L f_R^a}{f_L^a f_R} \right)}_{\text{energetische fB}} + A_0$$

↑
ohne fB